



## VAC-4000UHD

The IDK VAC-4000UHD is a high-performance HDMI distribution amplifier for video and audio supporting 4K@60 and HDCP 2.2. The IDK VAC-4000UHD distributes 4K@60 video signals having four times the resolution of full HD to 4 HDMI outputs, which support HDCP 2.2. This distribution amplifier can convert digital audio to analog audio as well.

### ■ Specification

Item		Description	
Input	Video	Digital	Number / Signal 1 input / HDMI, DVI 1.0 (HDCP 1.4 / 2.2) (*1) / HDR (*2) / 3D (*3) / xvYCC - TMDS single link - TMDS clocks: 25 MHz to 300 MHz - Dot clocks: 25 MHz to 600 MHz - TMDS data rate: 0.75 Gbps to 18 Gbps
		Connector	1 female HDMI Type A
		Others	Color depth : 24 bit, 30 bit, 36 bit Deep Color (*5)
	Audio	Formats	VGA to 4K (*4) 480i / 480p / 576i / 576p / 720p / 1080i / 1080p / 4K (*4)
		Digital	Number / Signal 1 input / Multi-channel linear PCM up to 8 channels - Sampling frequency: 32kHz to 192kHz - Sample Size: 16bit to 24bit - Reference level: -20 dBFS - Max. input level: 0 dBFS
		Connector	1 female HDMI Type A
Output	Video	Digital	Number / Signal 4 outputs / HDMI, DVI 1.0 (HDCP 1.4 / 2.2) (*1) / HDR (*2) / 3D (*3) / xvYCC - TMDS single link - TMDS clocks: 25 MHz to 300 MHz - Dot clocks: 25 MHz to 600 MHz - TMDS data rate: 0.75 Gbps to 18 Gbps
		Connector	4 female HDMI Type A
		Others	Color depth : 24 bit, 30 bit, 36 bit Deep Color (*5)
	Audio	Formats	VGA to 4K (*4) 480i / 480p / 576i / 576p / 720p / 1080i / 1080p / 4K (*4)
		Digital	Number / Signal 4 outputs / Multi-channel linear PCM up to 8 channels - Sampling frequency: 32kHz to 192kHz - Sample Size: 16bit to 24bit - Reference level: -20 dBFS - Max. output level: 0 dBFS
		Connector	4 female HDMI Type A
	Analog	Number / Signal	1 output / Stereo L/R unbalanced signals (*6) - Output impedance: 75 Ω , - Reference level: -10 dBu - Max. output level: +10 dBu
		Connector	1 RCA jack
	Plug & Play		DDC2B (built-in EDID / EDID copied from monitors / can be selected from EDID of connected monitors) Built-in EDID: the maximum resolution can be selected.
Max. Cable distance		Input	1080p@60: up to 131.23 ft. approx. / 40 m, 4K@60: up to 39.37 ft. approx. / 12 m (*7)
		Output	1080p@60: up to 131.23 ft. approx. / 40 m, 4K@60: up to 39.37 ft. approx. / 12 m (*7)
Functions	Contents	Audio A/D and D/A conversion Anti-snow (*8) De-embedded audio from HDMI signal DDC buffer 7 segment LED signal status check Connection Reset (*9) Key lock	
Others	Power	100 - 240 VAC ± 10 %, 50 Hz/60 Hz ± 3 Hz	
	Power consumption	About 12 Watts	
	Dimensions	8.27 x 1.73 x 7.87 / 210 (W) x 44 (H) x 200 (D) mm (EIA rack 1/2U size, projections are not included)	
	Weight	3.31 lbs. approx. / 1.5kg	
	Temperature	Operating: 32°F to 104°F / 0°C to +40°C Storage: -4°F to 176°F / -20°C to +80°C	
	Humidity	Operating / Storage humidity: 20 % to 90 % (Non Condensing)	

\*1 Lip Sync, ARC, and HEC are not supported. CEC: Pass through between IN and OUT1

\*2 HDR will be supported when you connect HDR supported corresponding sink device and select external EDID setting, or when you copy EDID of HDR supported sink device by selecting EDID copy setting. If the unit supports HDR, all output signals from the unit are HDR supported signals.

\*3 3D will be supported when you connect 3D supported corresponding sink device and select external EDID setting, or when you copy EDID of 3D supported sink device by selecting EDID copy setting. If the unit supports 3D, all output signals from the unit are 3D supported signals.

\*4 4K format: 24 Hz / 25 Hz / 30 Hz / 50 Hz (4:4:4) / 59.94 Hz (4:4:4) / 60 Hz (4:4:4) are supported.

\*5 4K format: following color depth are supported.  
- 24 Hz / 25 Hz / 30 Hz: 24 bit, 30 bit, 36 bit (RGB, YCbCr 4:4:4, YCbCr 4:2:2)  
- 50 Hz / 59.94 Hz / 60 Hz : 24 bit, 30 bit, 36 bit (YCbCr 4:2:2, YCbCr 4:2:0)  
: 24 bit (RGB, YCbCr 4:4:4)

\*6 Analog audio output supports only 2 channel linear PCM.

\*7 The maximum cable distance is measured under following conditions:

- 1080p@60: when IDK's AWG24 cable was used and signals of 1080p@60 24 bit / pixel (8 bit / component) was input or output.

- 4K@60 : when IDK's 18 Gbps supported cable was used and signals of 4K@60 24 bit / pixel (8 bit / component) was input or output.

The maximum cable distance depends on the connected I/O devices. With some I/O combinations, and if you use cables of other manufacturer, video may be disturbed or may not be output even if signals are within the range mentioned above.


\*8 The anti-snow feature automatically fixes snow noise that is a specific symptom of HDCP-compliant signals and mainly occurs at start-up. This feature does not work when snow noise has already occurred during startup or when it occurs due to a bad condition of the transmission line.

\*9 For digital systems, some problems, such as an HDCP authentication error, can often be recovered by physically disconnecting and reconnecting the digital cables. However, the Connection Reset feature will fix these problems automatically without the need to physically plug and unplug the cables. It creates the same condition as if the cable were physically disconnected and reconnected. This feature only works for the MSD's output. If other devices are connected between the MSD's output and sink device, this feature may be invalid.

● All specifications and drawings are subject to change without notice. ● Please do not use the supplied AC adapter and power supply cable for other products. ● The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and other countries.

● PLink is a trademark in Japan, the United States, and other countries/regions. ● HDBaseT™ and the HDBaseT Alliance Logo are trademarks of the HDBaseT Alliance. ● The terms Anti-snow and Connection Reset are registered trademarks of IDK Corporation in Japan ● All other company and product names mentioned in this document are either registered trademarks or trademarks of their respective owners. In this document, the “®” or “™” marks may not be specified.

## ■ Front and rear panels

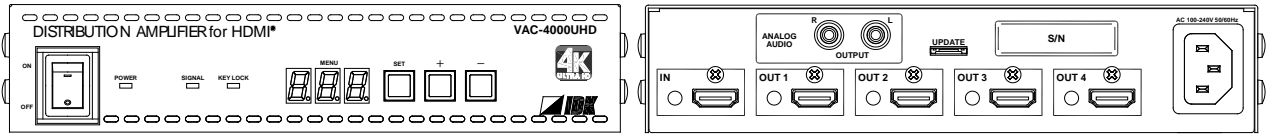


● All specifications and drawings are subject to change without notice. ● Please do not use the supplied AC adapter and power supply cable for other products. ● The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and other countries. ● P.JLink is a trademark in Japan, the United States, and other countries/regions. ● HDBaseT™ and the HDBaseT Alliance Logo are trademarks of the HDBaseT Alliance. ● The terms Anti-snow and Connection Reset are registered trademarks of IDK Corporation in Japan ● All other company and product names mentioned in this document are either registered trademarks or trademarks of their respective owners. In this document, the “®” or “™” marks may not be specified.



## 4K@60, HDCP 2.2 HDMI distribution amplifier (with audio embedder) VAC-4000UHD Diagram and Features


### ■ Diagram

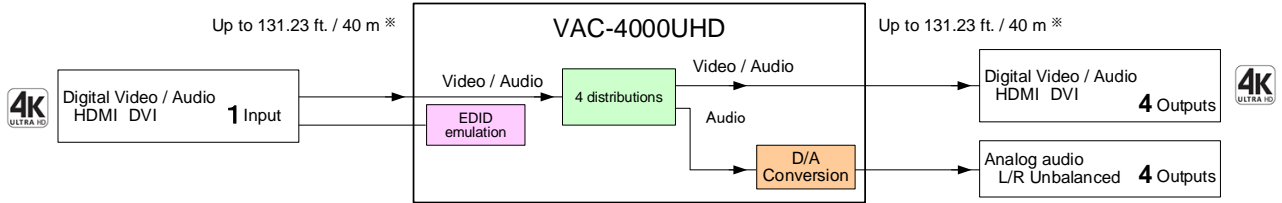

※ Maximum cable distance

1080p@60: up to 131.23 ft. approx. / 40 m, 4K@60: up to 39.37 ft. approx. / 12 m (when IDK's 18 Gbps supported cable was used)

### ■ Sample connection diagram

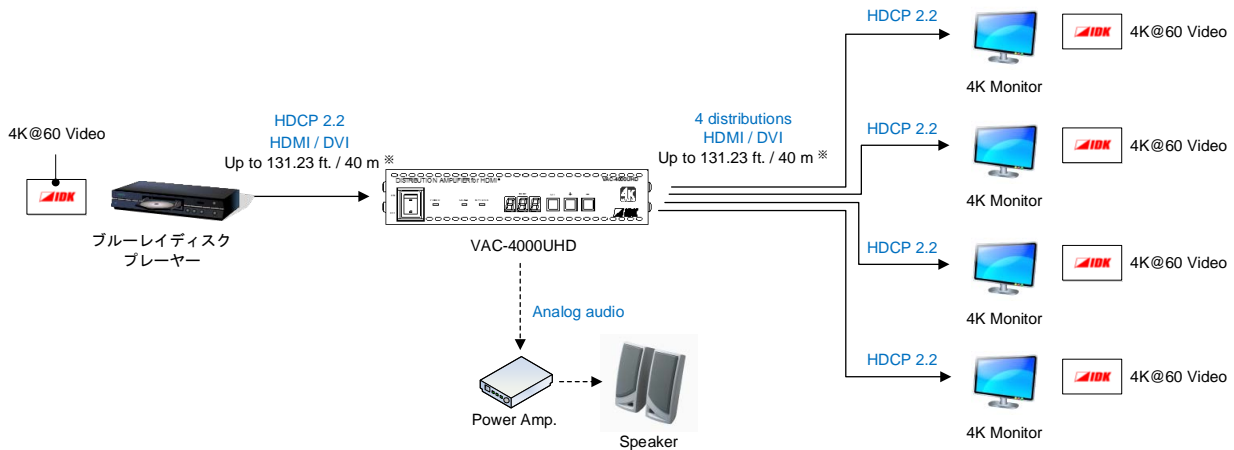

※ Maximum cable distance

1080p@60: up to 131.23 ft. approx. / 40 m, 4K@60: up to 39.37 ft. approx. / 12 m (when IDK's 18 Gbps supported cable was used)

### [Features]

#### ■ Video

- Up to 4K@60 (4:4:4)
- HDCP 1.4 / 2.2
- HDR
- 3D
- xvYCC
- Maximum input/output cable distance:
  - 1080p@60: up to 131.23 ft. approx. / 40 m
  - 4K@60: up to 39.37 ft. approx. / 12 m (using 18 Gbps supported High-Speed HDMI cable)
- Cascade connection
- Anti-snow

#### ■ Audio

- Analog audio de-embedded

#### ■ Others

- EDID emulation
- DDC buffering
- Seven-segment LED signal status check
- Connection reset
- CEC pass through between IN and OUT1

● All specifications and drawings are subject to change without notice. ● Please do not use the supplied AC adapter and power supply cable for other products. ● The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and other countries. ● PLink is a trademark in Japan, the United States, and other countries/regions. ● HDBaseT™ and the HDBaseT Alliance Logo are trademarks of the HDBaseT Alliance. ● The terms Anti-snow and Connection Reset are registered trademarks of IDK Corporation in Japan ● All other company and product names mentioned in this document are either registered trademarks or trademarks of their respective owners. In this document, the “®” or “™” marks may not be specified.